

Features

- Full range of output power from 16W to 1000W
- High linearity
- Redundant ready with no external controller
- Full M&C capability via RS485 or Ethernet port
- Forward and Reflected power monitoring
- Output Sample Port
- Redundant Systems shipped fully tested
- Infinite VSWR protection with automatic high reflected power shutdown
- Built-in Harmonic Filter
- Power factor correction
- CE marking

Overview

Advantech AMT C-Band line of Amplifiers and BUCs are intended for satellite up-link applications. The design of these units is based on Advantech's proven techniques resulting in high linearity and operating efficiency. Conservative thermal design contributes to the high MTBF for these units. Full monitor and control is provided via the serial or Ethernet ports. Special features such as automatic over-temperature shutdown and high-reflected power protection contribute to a trouble free operation.

The ARM-C series 19" rackmount SSPA/SSPB (BUC) is available in output power from 16W to 1000W. Higher power operation may be provided using external phase combining techniques offering an output power up to 1600W. Please contact factory for more details.

Advantech also offers the SUMMIT modular SSPA system for either indoor or outdoor applications.

The full set of accessories made available will facilitate the integration of these units in any application.

Options

- 1:1 or 1:2 Redundant configuration
- Phase combined systems for higher power
- L-Band input (SSPB/BUC operation)
- SNMP interface

Accessories

- Mounting slides
- Remote M&C panel

Redundancy

Advantech AMT C-Band line of Amplifiers and BUCs may be configured to operate in 1:1 or 1:2 redundancy mode. No extra controller is required for the redundancy operation as the built-in controller in each unit provides this function. For 1:1 redundancy operation, in addition to the two units (operating and standby) a special redundancy kit is required. For 1:2 redundancy operation another redundancy kit is needed in addition to the three units. The kits include the waveguide switches, terminations, splitter, interconnecting cable assemblies and mounting frames.

All redundancy systems are delivered fully tested.

C-Band Rack-mount SSPA/SSPB

Technical Specifications

Table A

Band*	RF Band (GHz)	L-Band Input for BUC (MHz)	LO for BUC (GHz)	Output Power (W)
CS	5.850 – 6.425	950 – 1525	4.900	16 - 1000
CX	5.850 – 6.725	950 – 1825	4.900	16 - 800
CL	4.400 – 5.000	950 – 1550	3.450	16 - 1000
CI	6.725 – 7.025	1225 – 1525	5.500	16 - 1000
CP	6.425 – 6.725	1025 – 1325	5.400	16 - 1000
CR	5.725 – 6.025	950 – 1450	4.775	16 - 1000

*Other frequency sub-bands are available. Please consult factory.

Table B

SSPA/SSPB (BUC) Line





Rated Power W	Psat dBm	P1dB dBm	Gain (dB) minimum		Availability in this series		Power Consumption W (nominal)	Weight	Dimensions Outline
			SSPA	BUC	CS CI CP	CX			
16W	+42	+41	+52	+62	√	√	170	37.5 lbs (17 kg)	3RU Outline #1
20W	+43	+42	+53	+63	√	√	180		
25W	+44	+43	+54	+64	√	√	200		
30W	+45	+44	+55	+65	√	√	250		
40W	+46	+45	+56	+66	√	√	300		
50W	+47	+46	+57	+67	√	√	350		
60W	+48	+47	+58	+68	√	√	550	66 lbs (30kg)	4RU Outline #2
80W	+49	+48	+59	+69	√	√	800		
100W	+50	+49	+60	+70	√	√	900		
125W	+51	+50	+61	+71	√	√	950		
150W	+52	+51	+62	+72	√	√	1000		
200W	+53	+52	+63	+73	√	√	1100	99 lbs (45kg)	5RU Outline #3
250W	+54	+53	+64	+74	√	√	1400		
300W	+55	+54	+65	+75	√	√	1700		
350W	+55.5	+54.5	+65	+75	√	√	2000		
400W	+56	+55	+66	+76	√	√	2200	198 lbs (90kg)	8RU Outline #4
500W	+57	+56	+67	+77	√	√	2700		
600W	+58	+57	+68	+78	√	√	3500		
700W	+58.5	+57.5	+69	+79	√	√	4000		
800W	+59	+58	+70	+80	√	√	4500		
	+60	+59	+70	+80	√	-	5500		

C-Band Rack-mount SSPA/SSPB

General Specifications

Operating Frequency	See table A
L-Band input (BUC)	See table A
Output Power	See table B
Gain	See table B
Gain adjustment range	20 dB in 0.1 dB steps
Gain flatness over full band	± 1dB max (SSPA), ±1.5dB max (SSPB)
Gain slope over 40 MHz	± 0.3 dB max
Gain variation over temperature	± 1.5 dB max
Input Impedance and VSWR	50 Ω SSPA 1.3:1 SSPB (BUC) 1.4:1
Output VSWR	1.25:1
Noise power density	-70 dBm/Hz in Transmit Band, -150 dBm/Hz in Receive Band (3.40 – 4.20 GHz)
Spurious at P1dB	-60 dBc max
Harmonics	-60 dBc @ P1dB, -70 dBc @ P1dB -3 dB max
AM/PM conversion	2.5 ^o /dB at P1Db
Third order intermod (two tones)	-26 dBc at 3 dB total back-off from rated P1dB
Group delay	Linear 0.02 nsec/MHz max Parabolic 0.003 nsec/MHz ² max Ripple 1 nsec p-p max
Residual AM Noise	0 – 10 kHz -45 dBc 10 kHz – 500 kHz -20 (1.25 + log F) dBc F = Frequency in kHz 500 kHz – 1 MHz -80 dBc
SSPB (BUC)	
Local Oscillator frequency	See table A
Reference frequency	10 MHz stability ±1 ⁻⁸ over temp range ±2 ⁻¹⁰ /day
Phase Noise	-60 dBc/Hz at 10Hz -85 dBc/Hz at 10 kHz -65 dBc/Hz at 100Hz -95 dBc/Hz at 100 kHz -75 dBc/Hz at 1000Hz
External Reference Frequency phase noise (max)	-115 dBc/Hz at 10Hz -150 dBc/Hz at 10 kHz -135 dBc/Hz at 100Hz -160 dBc/Hz at 100 kHz -148 dBc/Hz at 1000Hz
Weight & Dimensions	See table B
AC input voltage	Up to 250W output power 95 - 265 VAC, 47-63 Hz, Option 48V DC 300W output power and higher 220VAC 47 – 63 Hz
Cooling system	Forced air with front intake
Interfaces	Input (RF or L-Band) N type female Output Sample Port N type female RF output CPR137 contact AC line IEC 320 inlet RS232 serial port D-sub 9S RS485 D-sub 9S Ethernet (option) RJ45
Environmental	Temperature Operating 0°C to +50 °C Storage -55°C to +85 °C Humidity 5% to 95% non-condensing Altitude 10,000' AMSL, derated by 2 °C/1000' from AMSL

C-Band Rack-mount SSPA/SSPB

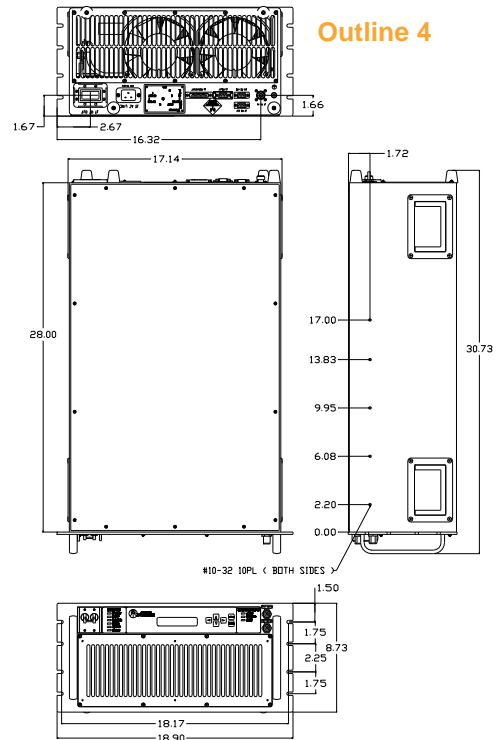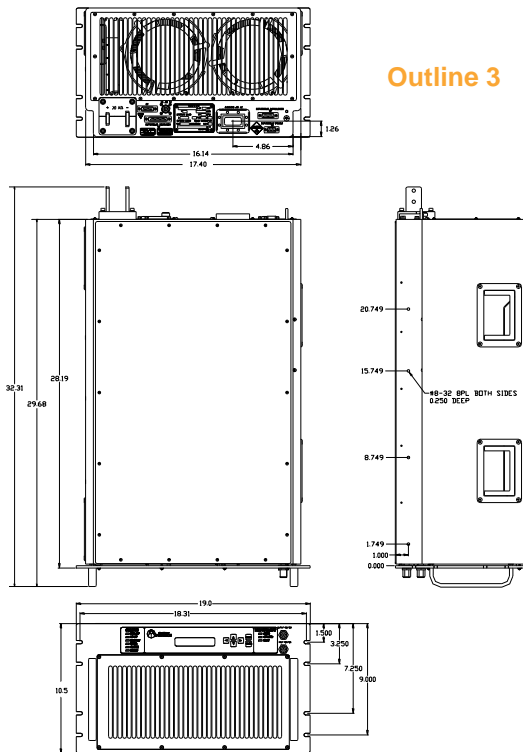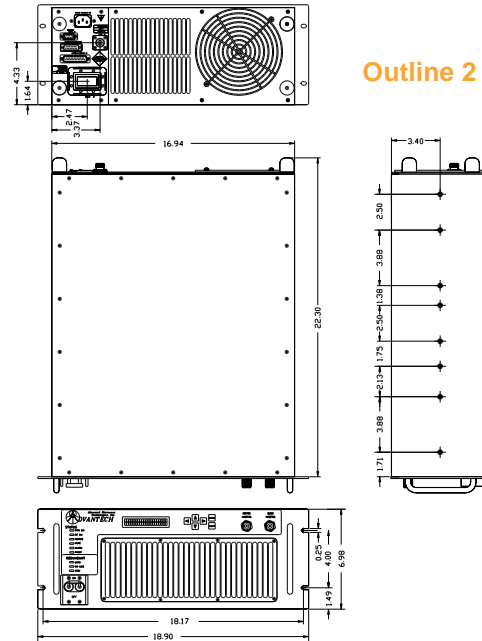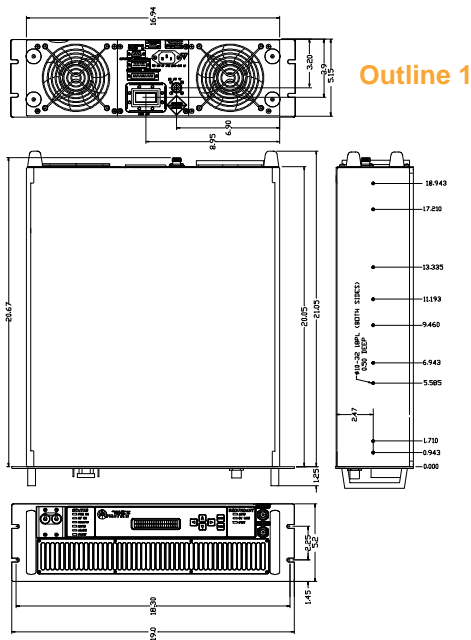

NORTH AMERICA
USA
Tel: + 1 703 788-6882
Fax: +1 703 788-6511
info.usa@advantechwireless.com

CANADA
Tel: +1 514 420-0045
Fax: +1 514 420-0073
info.canada@advantechwireless.com

EUROPE
UNITED KINGDOM
Tel: +44 1480 357 600
Fax: +44 1480 357 601
info.uk@advantechwireless.com

RUSSIA & CIS
Tel: +7 495 967 1859
Fax: +7 495 967 30 24
info.russia@advantechwireless.com

SOUTH AMERICA
BRAZIL
Tel: +55 11 3054 5701
Fax: +55 11 5041 4026
info.brazil@advantechwireless.com

ARGENTINA
Tel: +54 11 4731 1034
Cel: +54 911 4492 5601
info.argentina@advantechwireless.com

An ISO 9001 : 2008 Company



Ref.: PB-ARMA-C-16-1000-11025