


# Model ASC 300KuET-Tri-band Extended Beacon Receiver

Quality Products @ Reasonable Prices

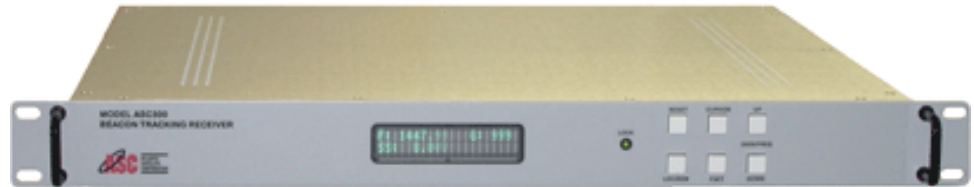

## Functional Description

The Model **ASC300KuET-Triband Extended Beacon Receiver** is a high performance self contained unit that is designed to real time track the power density of a satellite beacon and output a DC voltage that is linearly proportional to the beacon power by utilizing a true, RMS-responding power detector. The **ASC300KuET will tune over the three primary Ku band satellites (10.7-11.70 GHz, 11.70-12.20 GHz, 12.25-12.75 GHz) by utilizing internal block down converters.** The applications for the **ASC300 Ku-T** are for antenna tracking controllers and uplink power control system.

## Systems Specifications

Input Frequency ..... 10.7 to 12.75 Ghz  
 ..... Internal Block Converter  
 Pre-detection Bandwidth ..... 40 kHz  
 Input Level ..... -80 dBm, min.; -50 dBm max.  
 ..... For full tracking range capability  
 Frequency Tuning ..... 10 kHz Steps  
 Frequency Adjust ..... Front Panel or Remotely  
 AFC .....  $\pm 20$  kHz  
 Threshold ..... <45 dB-Hz (C/N<sub>0</sub>) for acquisition  
 Input Impedance ..... 50 Ohm  
 Input Connector ..... Type-N, Female  
 ..... (SMA Optional)  
 Output Impedance ..... 100 Ohm, single ended  
 Output Connector. Terminal plug and BNC Female  
 Tracking Gradient ..... 0.5 V/dB, Std  
 Tracking Response ..... 0 to +10 VDC for a  
 ..... 20 dB input level change  
 System Level Adjust ..... 30 dB, Linear  
 Frequency Stability ..... <1 ppm, 0°c to +50°c  
 Frequency Reference ..... 10 MHz (Internal)

Phase Noise ..... >75 dB-Hz, 1 kHz from Carrier  
 Alarms ..... Unit Lock, LNB Power  
 Alarm Relay ..... Form-C  
 External LNB Power ..... None  
 Continuous Digital Streaming ..... RS-232 or RS-422  
 DB9 interface connector ..... (optional) See Below \*  
 Front Panel Display ..... Vacuum Fluorescent  
 M&C ..... RS-232 or RS-422/485 Switchable  
 on rear panel ..... Ethernet 10/100 Base T (Optional)  
 M&C Connector ..... DB-9, Female  
 Ethernet ..... RJ-45 Connector

### Physical Characteristics

Size ..... 1.75"H X 16.00"D X 19.00"W  
 Weight ..... 14 lb. (6.35 kg)  
 Primary Power ..... 90 - 264 VAC 47 - 63Hz, 1.4 A  
 ..... Auto-Sensing

### Environmental Specifications:

Operating Temperature ..... 0°c to +50°c  
 Storage Temperature ..... -40°c to +70°c  
 Humidity ..... —95% RH@ 40°c

ATLANTIC SATELLITE CORPORATION

259 Expressway Court  
 Virginia Beach, Virginia 23462

Phone: 757-318-3500  
 Fax: 757-318-7020  
 Email: sales@atlanticsat.com  
 www.atlanticsat.com

### \* CDS Continuous Digital Streaming

The streaming option associated with the ASC300 series of beacon receivers provides a continuous, two byte, data stream running at 9600 baud that contains twelve bits of signal strength level indication as well as lock or alarm condition of the unit. Other baud rates are available. A female DB9, interface connector on the rear of the unit is specifically dedicated for this option.