




BAIRD Non-Penetrating Supporting System

Versatile Satellite Antenna Base
Engineered for durability, simplicity, and flexibility

1. Sets up fast.
2. Rock solid.
3. Hot dip galvanized for superior and long term durability.
3. Typical usage antenna size 10' (3.0M) to 12' (3.7M) for transmit and receive.
4. Drop shipped direct to installers.

DESCRIPTION

1. Constructed of high test steel tube.
2. All joints welded.
3. Hot dip galvanized.
4. Requires no drilling to install.
5. Ballast obtained locally.

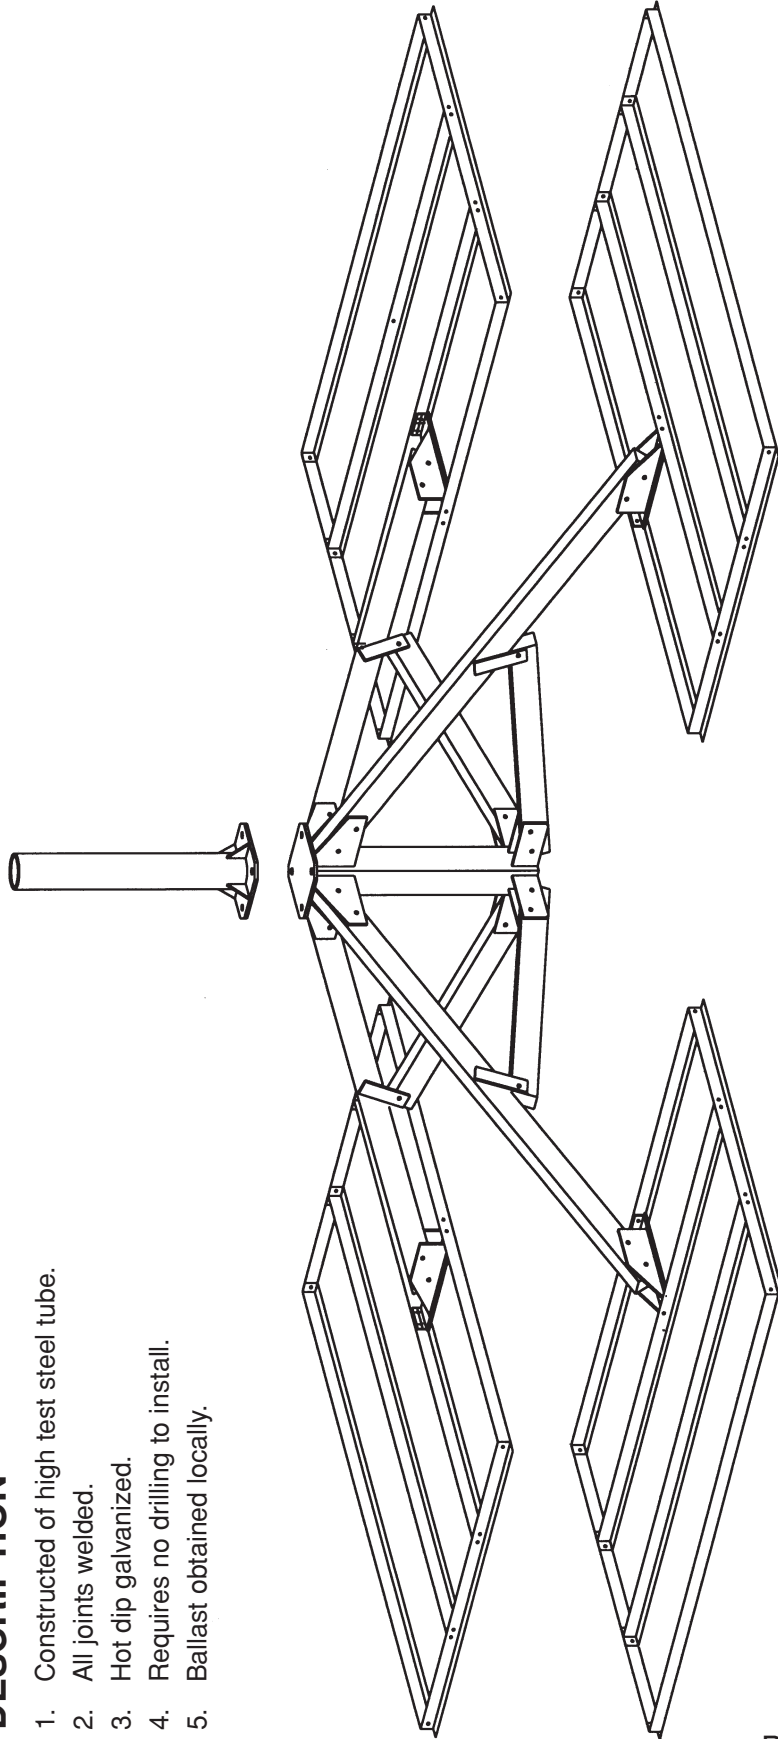

UNIVERSAL MOUNT
MODEL: PXL-2



PRODUCT SPECIFICATIONS

MODEL: PXL-2

Non-Penetrating or Penetrating flat roof antenna supporting system.

TYPICAL USAGE

1. Handles up to a 12.0' (3.7M) antenna.
2. Ku & C band - transmit and receive.
3. Pad areas - 25.00 and 33.33 sq.ft.
4. Footprints
 - a. 4' x 6' = 17.7' x 17.7' = 313.29 sq.ft.
 - b. 5'4" x 6' = 20.3' x 20.3' = 412.1 sq.ft.

Finish - Hot dip galvanized
Mast Diameter - as required
Mast Height - as required

The mount if needed can be equipped with a leveling device.

Ballast required will be recommended based on antenna diameter, type and survival requirements.

It is the customer's responsibility to see that all applicable codes are satisfied. It is suggested that a structural engineer review the application of this product.

An engineering report is available to assist with determining the proper amount of ballast.

A pad can be supplied to isolate the mount from the roof surface.

Under extreme wind conditions the mount should be tethered with cable.

