

Ku band PLL LNB

Model No. NJR2535S

Model No. NJR2536S

Model No. NJR2537S

Model No. NJR2539S

Specifications

Rev.03M February 18, 2003

Copyright 2003

New Japan Radio Co., Ltd.

Microwave Components Division

-Notice of Proprietary Information-

This documents and its contents are proprietary to New Japan Radio Co., Ltd.
This publication and its contents may not be reproduced or distributed for any
other purpose without the written permission of New Japan Radio Co., Ltd.



1. Scope

This specification details the requirements for the low noise and block downconverter intended for the satellite data communication downlink application in the Ku-Band.

This LNB has a combined 3-stage HEMT Amplifier and Block Down Converter with a Phase Locked Local which is constituted with a S-Band VCO, Multiplier, Loop Filter and TCXO providing high stability and low phase noise.

All specifications shall apply throughout the full range of the specified environmental conditions unless otherwise specified.

2. Electrical Specifications

#	Item	Specification
2-1.	Input Frequency Band	11.70 to 12.20 GHz <Model No. NJR2535S> 12.25 to 12.75 GHz <Model No. NJR2536S> 10.95 to 11.70 GHz <Model No. NJR2537S> 11.20 to 11.70 GHz <Model No. NJR2539S>
2-2.	Input Waveguide Flange	WR 75
2-3.	Input V.S.W.R.	2.5 : 1 typ.
2-4.	Noise figure (Ta: +25 C)	0.8 dB typ. 1.2 dB max.
2-5.	Output Frequency	950 to 1,450 MHz <Model No. NJR2535S/36S/39S> 950 to 1,700 MHz <Model No. NJR2537S>
2-6.	Conversion Gain (Ta: +25 C)	55 dB min. 60 dB typ.
2-7.	Conversion Gain Variation (Ta: +25 C)	2.0 dB max. in any 50 MHz segment over the frequency band.
2-8.	Output Power for 1 dB Gain Compression	0 dBm min.
2-9.	Intermodulation Products (3rd order Intermodulation rejection with two RF input carriers separated by 10 MHz, -10 dBm IF Output Power)	45 dBc min
2-10.	Local Oscillator Leakage Levels	-25 dBm max. at the IF Output Connector. -60 dBm max. at the RF Input Flange.
2-11.	Local Oscillator Frequency Accuracy	<Model No. NJR2535S> 10.75GHz +/- 2.5 ppm (Temp.; -30 to +60 C) 10.75GHz +/- 3.0 ppm (Temp.; -40 to +60 C) <Model No. NJR2536S> 11.30 GHz +/- 2.5 ppm (Temp.; -30 to +60 C) 11.30 GHz +/- 3.0 ppm (Temp.; -40 to +60 C) <Model No. NJR2537S> 10.00 GHz +/- 2.5 ppm (Temp.; -30 to +60 C) 10.00 GHz +/- 3.0 ppm (Temp.; -40 to +60 C) <Model No. NJR2539S> 10.25 GHz +/- 2.5 ppm (Temp.; -30 to +60 C) 10.25 GHz +/- 3.0 ppm (Temp.; -40 to +60 C)
2-12.	Phase Noise (SSB)	-70 dBc/Hz at 100 Hz -80 dBc/Hz at 1 kHz



#	Item	Specification
2-13.	Spurious	a) -140 dBm max. at input, Fixed frequency spur, unrelated to test CW signal. (Measured at specified IF band ; 950 to 1,450 or 1,700 MHz) b) -50 dBc max. With test CW signal -10 dBm IF output (Measured at specified IF band ; 950 to 1,450 or 1,700 MHz)
2-14.	Image Rejection	45 dB min.
2-15.	Output V.S.W.R. (75 ohm)	2.3 : 1 max. <Model No. NJR2535S/36S/39S> 3.0 : 1 max.. <Model No. NJR2537S>
2-16.	Input Voltage	+15 to +24 V DC
2-17.	Current Drain	250 mA typ. 300 mA max.

3. Environmental Specifications


#	Item	Specification
3-1.	Operating Temperature Range	-40 to +60 C
3-2.	Storage Temperature Range	-40 to +80 C
3-3.	Humidity	100 % Rh max.
3-4.	Vibration	5 G (f : 50 Hz, T : 5 min. Direction : X,Y,Z)
3-5.	Shock	15 G (Direction : X,Y,Z)

4. Absolute Maximum Rating

#	Item	Specification
4-1.	RF Input Power	-10 dBm (@ CW)
4-2.	Supply Voltage	+28 Vdc



5. Outline Drawing

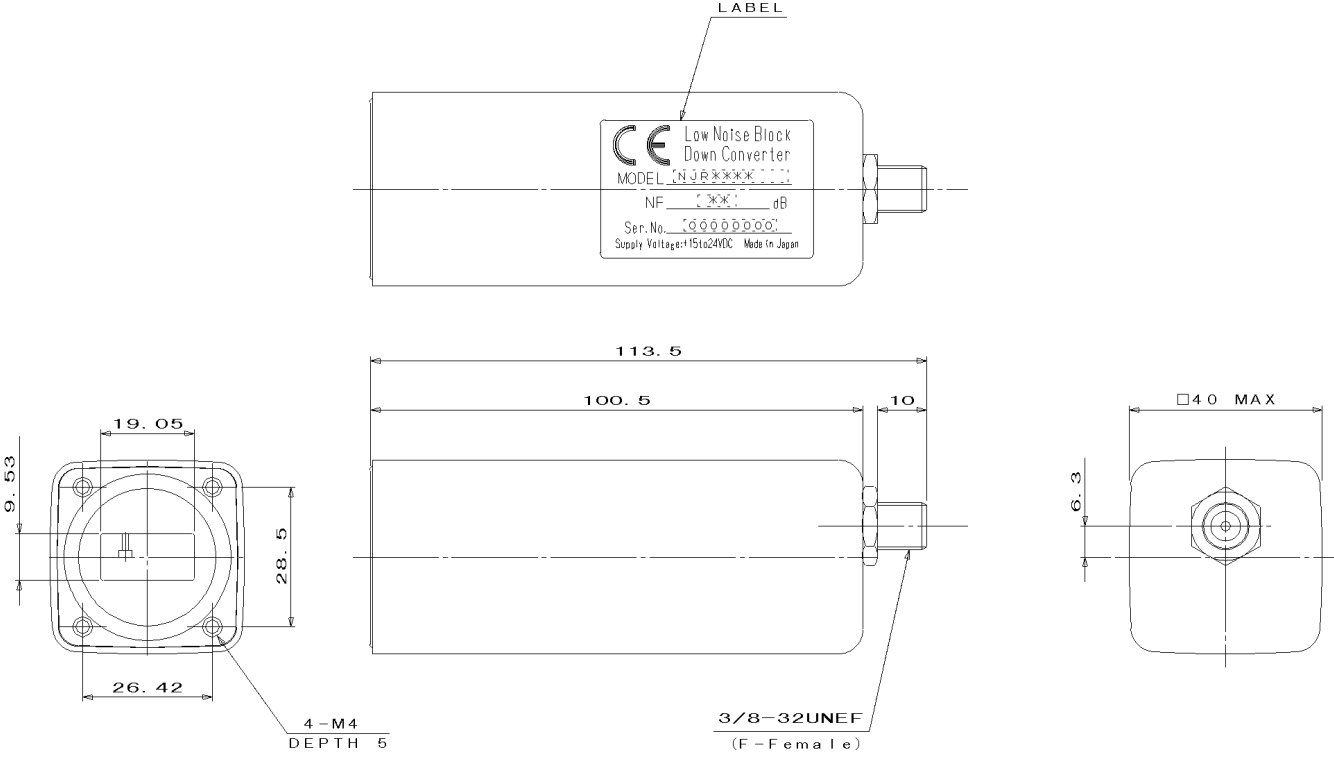

Unit : mm