



DESCRIPTION

Paradise Datacom's High Power Outdoor (W) series SSPAs represent the latest in High Power Microwave Amplifier Technology. The SSPA package achieves the highest power density in the industry along with enhanced maintainability.

All subassemblies are accessible and replaceable in the field. Local, front panel, control is available with a user friendly interface. A full compliment of serial and parallel (contact closure) control is also available via circular connectors.

A state of the art thermal platform provides efficient cooling for the amplifier module and power supplies. This ensures the highest possible MTBFs for microwave power amplifiers.

Along with high reliability comes the ultimate in amplifier maintainability. Amplifier modules and power supplies are easily accessed and removed, making this one of the easiest amplifier assemblies to maintain in the field.

FEATURES

- Extremely High Power Density:
 - 600W S-Band
 - 500W X-Band
 - 600W C-Band
 - 250W Ku Band
- Field Replaceable Subassemblies
- RF Output Sample Port (-40dBc)
- Ethernet Port
- RF Gain Adjustment (20 dB)
- Built-in 1:1 Redundancy Control

OPTIONS

- RF input sample port (-10 dBc)
- 48 VDC operation
- L-Band Input operation
- Reflected Power Monitor
- Phase Combined Systems
- Fiber Optic Input
- Antenna Mounting Kit
- Receive Band Reject Filter for S-Band units up to 400W in sub-band A

SPECIFICATIONS

- Housing:
 - 21.0 X 27.95 X 13.5 in.
 - 533 X 710 X 343 mm
 - 125.0 lbs. / 57 kg;
- White powder coat finish
- Operating temperature: -40 to +60 °C
- Relative Humidity: 100% condensing
- Integrated Forced-Air Cooling



S-Band Output Power Levels

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	Band A Band B	2.020 to 2.120 2.200 to 2.300	GHz GHz
Output Power @ Saturation / P _{1dB} Typical / Guaranteed Minimum	Band A HPAS2300AWXXXXX (2.020 - 2.090 GHz) HPAS2300AWXXXXX (2.095 - 2.120 GHz) HPAS2400AWXXXXX (2.020 - 2.090 GHz) HPAS2400AWXXXXX (2.095 - 2.120 GHz) HPAS2500AWXXXXX (2.020 - 2.090 GHz) HPAS2500AWXXXXX (2.095 - 2.120 GHz) HPAS2600AWXXXXX (2.020 - 2.090 GHz) HPAS2600AWXXXXX (2.095 - 2.120 GHz) Band B HPAS2300BWXXXXX (2.200 - 2.300 GHz) HPAS2400BWXXXXX (2.200 - 2.300 GHz) HPAS2500BWXXXXX (2.200 - 2.300 GHz) HPAS2600BWXXXXX (2.200 - 2.300 GHz)	P _{sat} /P _{1dB} 55.0 / 54.5 (316/280) 54.4 / 54.0 (280/250) 56.5 / 56.0 (447/400) 56.0 / 55.5 (400/355) 57.2 / 57.0 (525/500) 56.7 / 56.5 (468/447) 58.0 / 57.5 (631/560) 57.5 / 57.0 (560/500) 55.0 / 54.5 (316/280) 56.5 / 56.0 (447/400) 57.2 / 57.0 (525/500) 58.0 / 57.5 (631/560)	dBm (W) dBm (W) dBm (W) dBm (W) dBm (W) dBm (W) dBm (W) dBm (W) dBm (W) dBm (W) dBm (W) dBm (W)
Prime Input Power Line Voltage Line Frequency Line Power	Power factor corrected HPAS2300A/BRXXXXX (180 - 265 VAC) HPAS2400A/BRXXXXX (180 - 265 VAC) HPAS2500ARXXXXX (180 - 265 VAC) HPAS2600ARXXXXX (180 - 265 VAC)	47– 63 1600 1800 3500 3800	Hz W W W W

C-Band Output Power Levels

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	(see options for extended band)	5.850 to 6.425	GHz
Output Power @: Saturation/P _{1dB} (Typical/Guaranteed minimum)	HPAC2250AW HPAC2300AW HPAC2400AW HPAC2500AW HPAC2600AW	P _{sat} / P _{1dB} 53.9/53.0 (250/200) 54.7/54.0 (300/251) 56.0/55.0 (400/316) 57.0/56.0 (500/400) 57.8/57.0 (600/500)	dBm (W) dBm (W) dBm (W) dBm (W) dBm (W)
Power Requirements Line Voltage Line Frequency Line Power	Power Factor corrected Autoranging HPAC2250AW (180 to 265 VAC) HPAC2300AW (180 to 265 VAC) HPAC2400AW (180 to 265 VAC) HPAC2500AW (180 to 265 VAC) HPAC2600AW (180 to 265 VAC)	> 0.9 47 - 63 1300 1700 2400 2800 3700	Hz W W W W W

X-Band Output Power Levels

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	(see options for extended band)	7.90 to 8.40	GHz
Output Power @: Saturation/P _{1dB} (Typical/Guaranteed minimum)	HPAX2350AW HPAX2500AW	P _{sat} / P _{1dB} 55.5/54.5 (354/282) 57.0/55.7 (500/370)	dBm (W) dBm (W)
Power Requirements Line Voltage Line Frequency Line Power	Power Factor corrected Autoranging HPAX2350AW (180 to 265 VAC) HPAX2500AW (180 to 265 VAC)	> 0.94 47 - 63 2700 4000	Hz W W

Specifications are subject to change.



High Power Outdoor Solid State Power Amplifiers

Ku-Band Output Power Levels

PARAMETER	NOTES	LIMITS	UNITS
Frequency Range	(see options for extended band)	14.00 to 14.50	GHz
Output Power Saturation/P1dB (Typical/Guaranteed minimum)	HPAK2200AW HPAK2250AW	Psat / P1dB 53.0/52.0 (200/158) 54.0/53.0 (250/200)	dBm (W) dBm (W)
Power Requirements	Power Factor corrected	> 0.94	
Line Voltage	Autoranging	47 - 63	Hz
Line Frequency	HPAK2200AW (180 to 265 VAC)	2500	W
Line Power	HPAK2250AW (180 to 265 VAC)	2800	W

Common Specifications; HPA_2000XW Series

Electrical Specifications

PARAMETER	NOTES	LIMITS	UNITS
Gain	range	55-75	dB
Gain Flatness	full band	±1.0	dB
Gain Slope	Extended C-Band units per 40 MHz (C-,X-,Ku-bands)	±1.5	dB
	per 10 MHz (S-band)	±0.3	dB/40 MHz
Gain Variation vs. Temperature	-40°C TO +60°C	±0.1	dB/10 MHz
Gain Adjustment	0.1 dB resolution	±1.0	dB
Intermodulation Distortion	3dB back off relative to P _{1dB}	20	dB
AM/PM Conversion	(@ rated P _{1dB})	-25	dBc
	(@ P _{1dB} -3dB)	3.5	°/dB
Spurious Harmonics	(@ rated P _{1dB})	1.0	°/dB
	(@ rated P _{1dB} -3dB) (C-,X-,Ku-bands)	-60	dBc
	(@ rated P _{1dB} -3dB) (S-band)	-50	dBc
Input/Output VSWR	All units except Extended C-Band Extended C-Band units	-30	dBc
Noise Figure	at maximum gain	1.30:1 1.50:1	
Group Delay (per 40 MHz segment)	Linear	10	dB
	Parabolic	0.01	ns/MHz
	Ripple	0.003	ns/MHz ²
Noise Output	TX Band (S-,C-, X- or Ku-Band)	1.0	ns p-p
	RX Band (C- or Ku-Band)	-75	dBW/4 KHz
	RX Band (X-Band)	-150	dBW/4 KHz
	RX Band (S-Band)	-100	dBW/4 KHz
Residual AM Noise	0 - 10 KHz 10 KHz - 500 KHz 500 KHz - 1 MHz	See options	
Phase Noise	Offset frequency from carrier	-45	dBc
	10 Hz	-20 (1.25 + log F)	dBc
	100 Hz	-80	dBc
	1 KHz		
	10 KHz		
	100 KHz		
1 MHz			


Mechanical Specifications

Size	width X height X depth	21.0 X 27.95 X 13.5 533 X 710 X 343	inches mm
Weight		125 (57)	lbs.(kg)
Finish		powder coat	white

Specifications are subject to change.

Options

Extended C-Band 5.850 to 6.725 GHz 5.750 to 6.670 GHz 6.425 to 7.025 GHz	De-rate power by 1.0dB linearly from 6.425 to 6.725 GHz De-rate power by 1.0dB linearly from 6.425 to 6.725 GHz Available in power levels up to 500W	Model: HPAC2XXXBWXXXXX HPAC2XXXCWXXXXX HPAC2XXXE/FWXXXXX	
Extended X-Band 7.70 to 8.40 GHz	De-rate power by 1.0dB linearly from 7.90 to 7.70 GHz	Model: HPAX2XXXDWXXXXX	
Extended Ku-Band 13.75 to 14.5 GHz	De-rate power by 1.0dB linearly from 14.0 to 13.75 GHz	Model: HPAC2XXXBWXXXXX	
Reflected Power Monitor	See the configurator for Model numbers for this option.		
Receive Band Reject Filter (S-Band SSPAs only) Filter integrated into SSPA chassis through 400W Output 500W and 600W SSPAs require external filter.	Insertion Loss Rx Reject @ 2.200 GHz Rx Reject @ 2.025 - 2.120 GHz	- 0.5 -60 -60	dB dB dB
Receive Band Noise Power Density	Without optional filter With optional filter	-95 -155	dBw/4 KHz dBw/4 KHz

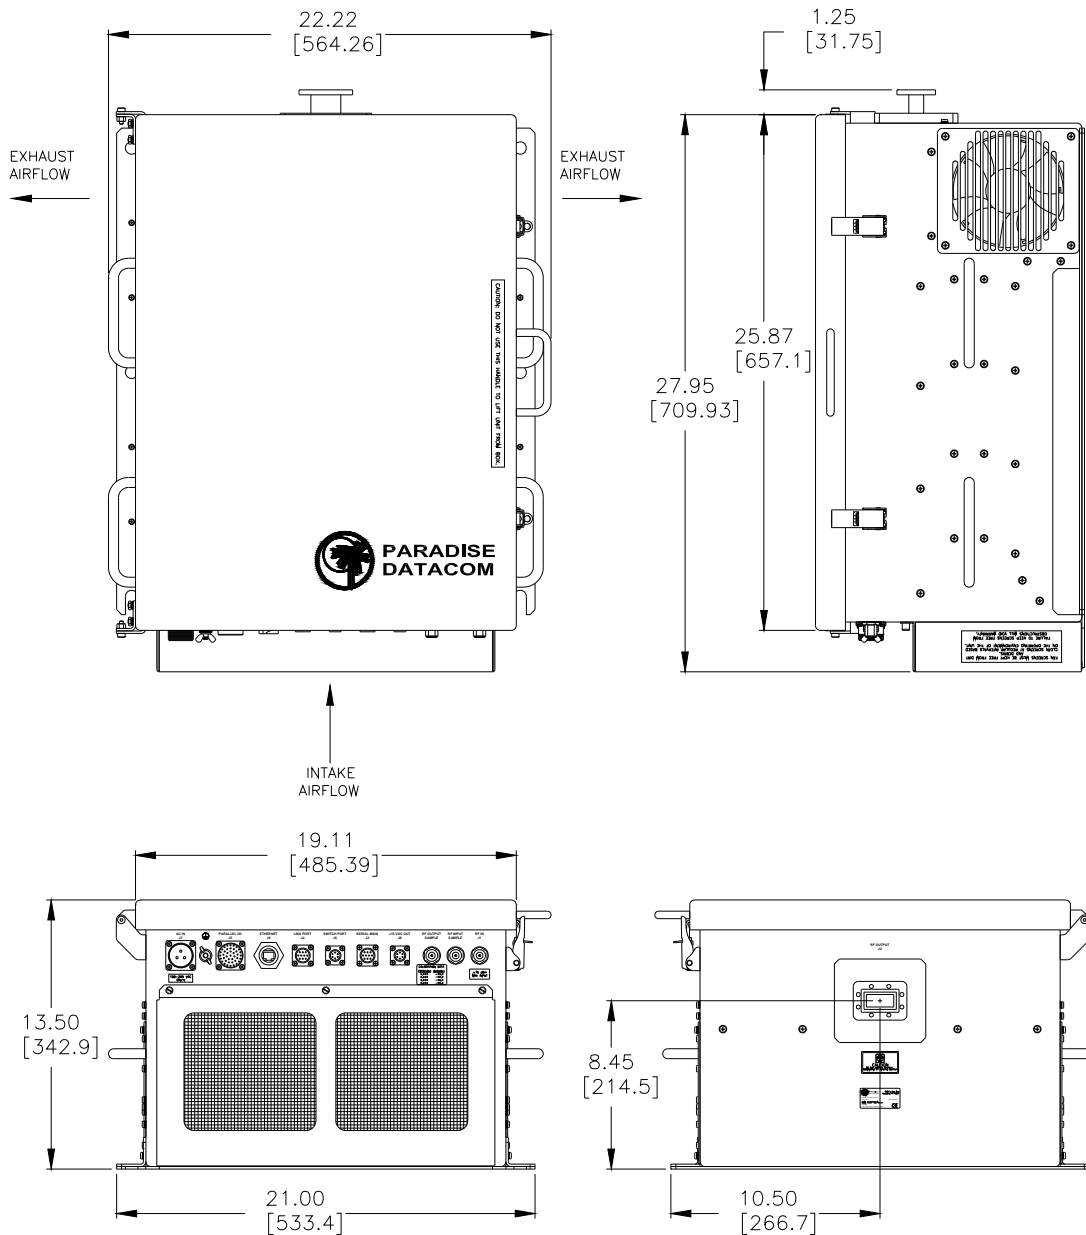



Interface Specifications; HPA 2000XW Series

PARAMETER	NOTES	LIMITS	UNITS
Monitor & Control (J5) Connector: MS3112E20-41S Mating Connector: MS3116E20-41P	Parallel Port Outputs Form C Relays Contact conditions on fault (Closed, Open, Common) Mute Status RF Switch Position Parallel Port Inputs	Power Supply Fault Auxiliary Fault Mute Status Block Up Converter Fault Temperature Fault Current Fault Low RF Alarm	Pins A, B, C Pins D, E, F Pins G, H, J Pins K, L, M Pins N, P, R Pins V, W, X Pins a, Y, Z
		Mute Input Local Remote Auxiliary Fault Input Standby Select Latched Fault Reset Auto/Manual Switching +5V pull-up Ground	Pin b Pin c Pin d Pin e Pin f Pin g Pins h, l, j, k, m Pin n
Main Serial Port (J3) Connector: MS3112E12-10P	RS232 / RS485 Summary Alarm	RS232 Out, RS485 TX- RS232 In, RS485 RX- RS485 RX+ RS485 TX+ Service Request 1 Service Request 2 Service Request Common Termination Ground	Pin A Pin B Pin C Pin D Pin E Pin F Pin G Pin H Pin J
Link Port (J4) Connector: MS3112E12-10S	1:1 Redundant System Control Link	RS485+ RS485- Link Out Link In Ground	A, B C, D E, F G, H Pin J
Switch Port (J6) Connector: MS3112E10-6S	Redundant Switch Control	+28 VDC RF Switch 1, pos 1 RF Switch 1, pos 2 RF Switch 2, pos 1 RF Switch 2, pos 2	A, B C E D F
RF Connectors	RF Input, Input & Output Sample RF Output HPAS2XXXXW HPAC2XXXXW HPAX2XXXXW HPAK2XXXXW	Type N Type N WR137 Waveguide WR112 Waveguide WR75 Waveguide	Female Female CPR137G flange (PDR-70) CPR112G flange (PDR-84) Grooved flange (PBR-120)
AC Input MS3102E20-3P	Line Power	Line Neutral Ground	A C B
Optional 48 VDC Input MS3102E20A37P	DC Input Power	+48 VDC Return	A,B C,D
Ethernet Port	Remote M&C, UDP, SNMP RJ45 (F)	TX+ TX- RX+ RX- Ground	1 2 3 6 4,5,7,8

Environmental Specifications

Operating Temperature	Ambient	-40 to +60	°C
Relative Humidity	Condensing	100	%
Cooling System	Integrated	Forced air	



Part Number Configuration

HPA 2 W

Band
S - S-Band
C - C-Band
X - X-Band
K - Ku-Band

Power Level (in Watts)
S-Band
300, 400, 500 or 600
C-Band
250, 300, 400, 500 or 600
X-Band
350 or 500
Ku-Band
200 or 250

Frequency Sub Band
S-Band
A - 2.020 - 2.120 GHz
B - 2.200 - 2.300 GHz
C-Band
A* - 5.85 - 6.425 GHz
B* - 5.85 - 6.725 GHz
C - 5.75 - 6.670 GHz
E* - 6.425 - 6.725 GHz (Palapa)
F* - 6.725 - 7.025 GHz (Insat)
G* - 5.750 - 6.475 GHz
X-Band
A* - 7.90 - 8.40 GHz
B - 7.50 - 8.50 GHz
D - 7.70 - 8.40 GHz
E - 7.75 - 8.50 GHz
Ku-Band
A* - 14.00 - 14.50 GHz
B* - 13.75 - 14.50 GHz

* Available with optional BUC

Configuration Modifier
XXX = Standard
SXX = Input Sample
XVX = Reflected Power
Monitor
XXR* = Receive Band Reject
Filter

* S-Band only

System Configuration
X = Standalone

See the following specification sheets for the appropriate configuration:

- Outdoor Packaged Redundant SSPA Systems (203581)
- Outdoor Packaged Phase Combined SSPA Systems (203582)

Block Up Converter
B = BUC (Custom)
M = Internal Reference ZBUC (FSK)
P = External Reference ZBUC (FSK)
X = None

An optional uni-strut mounting kit is available.

Example - A standalone 500W Extended C-Band High Power Outdoor SSPA with block up converter using an external reference is part number: **HPAC2500BWPXXXX**.