

Satellite Up- and Downconverter

Single / Dual / Triple Band
Single / Dual Channel
S-, C-, X-, Ku-, K(DBS)-, Ka*-Band



* Ka-Band version is under development

The satellite up- and downconverters which are developed and manufactured by WORK, are designed to satisfy the high requirements of modern satellite transmission, such as TV uplinks and high speed data networks. Analogue transmission formats are supported as well as digital transmission formats. For many years, these devices have been used worldwide for fixed satellite earth stations, satellite news gathering (SNG) vehicles, Fly-Aways and other mobile or portable applications (Special housing for compact mobile application is offered.). The up- and down-converters have been produced for more than 1200 times so far and customers worldwide appreciate their reliability and high level of quality.

4th Generation – still better

The 4th generation, based on our experience and skill, is still better. The synthesizer and oscillator portion in every satellite converter is the most important component because it decides the converter's reliability. For many years WORK has been developing and manufacturing high sophisticated microwave oscillators and synthesizers, which are used in our converter series as well. The new design allows us to reduce the number of components by more than 30%. In addition, significant improvements have been made on circuit design.

This design results in an AC power consumption of typically 35 VA / 27 W. This leads to an even higher reliability and longer life time.

S-, C-, X-, Ku- and K-Band coverage

The satellite converter series cover the satellite frequency bands S-, C-, X-, Ku- and K-Band, a Ka-Band (28 GHz) version is under development. The converters support the standard IF-frequency bands 70 ± 20 MHz and/or 140 ± 40 MHz. The conversion is performed without spectral inversion. The upconverters offer an increased power output ($P_{1dB} \geq +10$ dBm) in all versions. The units are available as single band or as triple band converters (see also next page under "Specials and OEM products").

High signal integrity

The extreme low phase noise of the oscillators guarantees an excellent signal quality. Low spurious emissions allow our customers to use the converters also in the environments with demanding requirements, such as high power video uplinks. Sophisticated temperature compensation guarantees the stability over a very wide temperature range.


Housing options

The converters normally are delivered without fans and can be operated in environments, where at minimum 1 RU space for natural ventilation is available above each unit. This eliminates the fan as potential point of failure. For rack installations without any space in between the units a fan within the converter unit is recommended, which forces an airflow from the right side to left side of the units.

Operating and control – easy integration into your system

The converters can be operated via the push buttons on the front panel using self-explanatory display menus or via remote control (RS232, RS422/485, TCP/IP over Ethernet). Detailed monitoring of the system status and a summary alarm output (dual change over switch contacts) are provided. For the remote control either ASCII string based commands as well as addressable, packet based commands are provided.

Remote monitoring and control through SNMP and a Web browser interface is now also available.

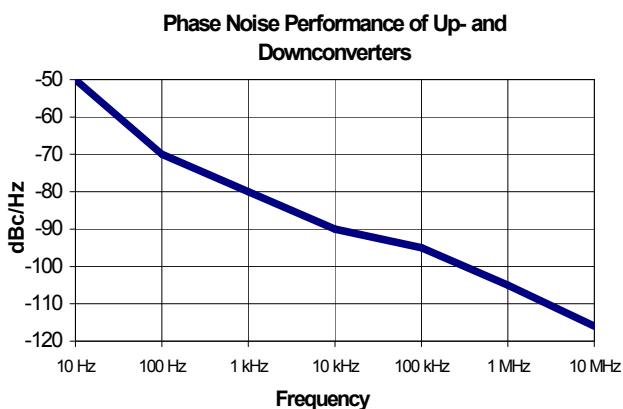

Specials and OEM products

WORK is specialized to offer custom tailored products. Converters are sold also as OEM products with our customer's brand name and logo on it.

We offer specials as follows:

- Modified or smaller housings to fit into your existing design for mobile and portable applications.
- Extended storage or operating temperature range.
- Military versions for hostile environment (shock, vibration, humidity).
- For downconverters: Application specific output filtering and automatic level control. The output level is kept constant independent of the strength of the input signal with adjustable control.
- Additional PLO output.

Key features

- 70 MHz or 140 MHz IF bands available
- Optional switchable IF 70 and 140 MHz (IF 70/140)

- Extreme low power consumption maximum 35 VA / 27 W (single band unit) 37 VA / 29 W (triple band units)
- Extreme low phase noise (< -50 dBc/Hz @ 10 Hz)
- Long- term stability 10^{-7} / year
- Output power +10 dBm (1dB compression point)
- Low spurious emissions < -80 dBm at full gain (high performance series)
- Automatic reference recognition (5 and 10 MHz)
- Adjustable gain equalizer ± 2.5 dB / 40 MHz
- Digital gain compensation
- Operating temperature range either -30°C to 60°C (-22°F to 140°F) or 0°C to 50°C (32°F to 122°F)
- Remote control through RS232, RS422/485 (2-wire or 4-wire) interfaces, TCP/IP over Ethernet, Web browser interface, SNMP (MIBs are provided).
- Packet command syntax supports RS485 bus systems and allows addressed operation.
- Test output on the front panel: RF-Test at upconverter, IF-Test at downconverter.
- Optional IF-Test output for upconverters on rear panel (Option: IFT)
- AC power switch on the front panel
- Summary alarm output (dual change over switch contacts)
- Transmit mute input
- Optional internal Fan (Option: FAN)
- CE compliant
- **3 years warranty**

Order information

WORK offers two series of 19" rack mount satellite converters, Standard and High Performance. The specifications are the same for both types except the operating temperature range. The High Performance type operates between -30°C to 60°C (-22°F to 140°F) and the standard type between 0°C to 50°C (32°F to 122°F). So if you only need units for inside use, the standard unit is perfectly suited for this application and it is significant cheaper.

Open questions, demo units

If you need more information about WORK's 4th satellite converter generation or if you would like to have demo unit, please contact us via e-mail: sales@work-satcom.com or call us. We are glad to assist you.

Satellite Upconverter

Indoor Version

Single / Dual / Triple Band Upconverter or Dual Channel Upconverter S-Type (standard version), H-Type (MIL version, extended temperature range)

Upconverter Type:	HCU-S / SCU-S	HCU-C / SCU-C	HCU-C1 / SCU-C1	HCU-X
RF-Output Frequency:	S-Band 2.025...2.290 GHz	C-Band 5.85...6.65 GHz	C-Band 5.85...7.025 GHz	X-Band 7.90...8.40 GHz
Intermediate Frequency:	2450 MHz for 70 MHz IF Input 2440 MHz for 140 MHz IF Input	2450 MHz for 70 MHz IF Input 2440 MHz for 140 MHz IF Input	2610 MHz for 70 MHz IF Input 2600 MHz for 140 MHz IF Input	2450 MHz for 70 MHz IF Input 2440 MHz for 140 MHz IF Input
Phase Noise:	10 Hz 100 Hz 1 kHz 10 kHz 100 kHz 1 MHz	-60 -80 -90 -98 -103 ¹⁾ -112 ¹⁾	-55 -69 ²⁾ -75 -79 ²⁾ -85 -89 ²⁾ -95 -99 ²⁾ -100 ¹⁾ -101 ²⁾¹⁾ -110 ¹⁾ -114 ²⁾¹⁾	-55 -69 ²⁾ -75 -79 ²⁾ -85 -89 ²⁾ -95 -99 ²⁾ -100 ¹⁾ -101 ²⁾¹⁾ -110 ¹⁾ -114 ²⁾¹⁾
	max. values in dBc/ Hz ¹⁾ 0°C to 50°C, outside this temperature range degraded by max 5 dB. ²⁾ with option: low phase noise			
Test Output: (Fixed Oscillator)	2520 MHz (70 MHz IF) 2580 MHz (140 MHz IF) -6 ± 3 dBm SMA female	2520 MHz (70 MHz IF) 2580 MHz (140 MHz IF) -6 ± 3 dBm SMA female	2680 MHz (70 MHz IF) 2740 MHz (140 MHz IF) -6 ± 3 dBm SMA female	2520 MHz (70 MHz IF) 2580 MHz (140 MHz IF) -6 ± 3 dBm SMA female
Test Output: (Microwave Oscillator)	4.475...4.740 GHz (70 MHz IF) 4.465...4.730 GHz (140 MHz IF) -7 ± 3 dBm SMA female	8.30...9.10 GHz (70 MHz IF) 8.29...9.09 GHz (140 MHz IF) -7 ± 3 dBm SMA female	8.46...9.635 GHz (70 MHz IF) 8.45...9.625 GHz (140 MHz IF) -7 ± 3 dBm SMA female	10.35...10.85 GHz (70 MHz IF) 10.34...10.84 GHz (140 MHz IF) -7 ± 3 dBm SMA female

Upconverter Type:	HCU-Ku / SCU-Ku	HCU-K / SCU-K	HCU-Ka / SCU-Ka	
RF-Output Frequency:	Ku-Band 12.75...14.50 GHz	K-Band 17.3...18.4 GHz	Ka-Band 29.7...31.5 GHz	
Intermediate Frequency:	2450 MHz for 70 MHz IF Input 2440 MHz for 140 MHz IF Input	2450 MHz for 70 MHz IF Input 2440 MHz for 140 MHz IF Input	2450 MHz for 70 MHz IF Input 2440 MHz for 140 MHz IF Input	
Phase Noise:	10 Hz 100 Hz 1 kHz 10 kHz 100 kHz 1 MHz	-50 -64 ²⁾ -70 -74 ²⁾ -80 -84 ²⁾ -90 -94 ²⁾ -95 ¹⁾ -96 ²⁾¹⁾ -105 ¹⁾ -109 ²⁾¹⁾	-50 -64 ²⁾ -70 -74 ²⁾ -80 -84 ²⁾ -90 -94 ²⁾ -95 ¹⁾ -96 ²⁾¹⁾ -105 ¹⁾ -109 ²⁾¹⁾	-56 -66 -76 -86 -88 ¹⁾ -101 ¹⁾
	max. values in dBc/ Hz ¹⁾ 0°C to 50°C, outside this temperature range degraded by max 5 dB. ²⁾ with option: low phase noise			
Test Output: (Fixed Oscillator)	2520 MHz (70 MHz IF) 2580 MHz (140 MHz IF) -6 ± 3 dBm SMA female	2380 MHz (70 MHz IF) 2300 MHz (140MHzIF) -6 ± 3 dBm SMA female	2380 MHz (70 MHz IF) 2300 MHz (140MHzIF) -6 ± 3 dBm SMA female	
Test Output: (Microwave Oscillator)	15.20...16.95 GHz (70 MHz IF) 15.19...16.94 GHz (140 MHz IF) -7 ± 3 dBm SMA female	14.85...15.95 GHz (70 MHz IF) 15.86...15.96 GHz (140 MHz IF) -7 ± 3 dBm SMA female	27.25...29.05 GHz (70 MHz IF) 27.26...29.06 GHz (140 MHz IF) -10 ± 3 dBm SMA female	
Conversion Scheme:	Dual up-conversion, no frequency inversion			
Frequency Resolution:	10 Hz			
IF-Input Characteristics:	Frequency: 70 ± 20 MHz or 140 ± 40 MHz (optional: both → [IF-Band] = 70/140) Impedance: 50 or 75 Ω Return Loss: 26 dB min IF-Connectors: BNC female			
RF-Output Characteristics:	Impedance: 50 Ω Return Loss: >20 dB (>17 dB HCU3-CKuK) 1 dB Compression Point: >10 dBm Output Muting: >60 dB (by command or sense input or by alarm condition) RF-Signal Monitor: -20 dB of RF-output RF-Connectors: SMA female			
Transfer Characteristics:	Max. Conversion Gain: 40 dB Attenuation Range: 0...30 dB, Step 0.1 dB (Conversion Gain 40...10 dB) Gain Accuracy: ± 1 dB Level Stability: ± 0.25 dB/day (constant temperature) Amplitude Response: ± 0.25 dB / ±20 MHz, ±0.2 dB / ± 18 MHz Image Rejection: >80 dB Noise Figure: <25 dB, 20 dB typical			

Specifications continued next page

Satellite Upconverter

Indoor Version

Single / Dual / Triple Band Upconverter or Dual Channel Upconverter S-Type (standard version), H-Type (MIL version, extended temperature range)

Specifications continued:

Equalizer (Gain Slope):	max ± 2.5 dB / 40 MHz (IF 70 MHz), max ± 4 dB / 80 MHz (IF 140 MHz) (programmable)
Group Delay (± 18 MHz):	Linear: 0.03 ns / MHz max. Parabolic: 0.01 ns / MHz ² max. Ripple: 1 ns peak to peak max.
Group Delay (± 36 MHz):	Linear: 0.015 ns / MHz max. Parabolic: 0.005 ns / MHz ² max. Ripple: 0.5 ns peak to peak max.
Intermodulation (3rd Order):	-36 dBc max (f_{in} : 67.5 and 72.5 MHz, P_{in} : 2 x -25 dBm, P_{out} : 2 x 0 dBm)
AM / PM conversion:	0.1° / dB (P_{out} = 0 dBm)
Spurious Outputs:	Signal related: < -60 dBc (Δf < 1 MHz), < -70 dBc ($\Delta f \geq 1$ MHz) Signal independent: < -70 dBm
Frequency Stability:	$\pm 1 \times 10^{-7}$, 0°C to 50°C $\pm 2 \times 10^{-8}$, 0°C to 50°C (after 30 min warm up) $\pm 5 \times 10^{-9}$ per day (fixed temperature after 24 h warm up)
Reference Input:	Frequency: 10 MHz or 5 MHz Level: -3...10 dBm Modes: internal, external, auto (senses reference input) Connector: BNC female
Reference Output:	Frequency: 10 MHz Level: 0 \pm 3 dBm Connector: BNC female
Monitoring and Control Interface:	Protocol: SNMP Connection: UDP over Ethernet (10 or 100 Mbit/s, auto sensing), connector RJ-45 Protocol: HTTP (web browser interface) Connection: TCP/IP over Ethernet (10 or 100 Mbit/s, auto sensing), connector RJ-45 Protocol: Multipoint Connection: RS232 or RS422/RS485 (configurable), connector DSUB09 female or TCP/IP over Ethernet (10 or 100 Mbit/s, auto sensing), connector RJ-45
Alarm Interface: Mute Input:	Alarm: two potential free contacts (DPDT), Mute Input: TTL logic input with internal pull up Connector DSUB09 female
Temperature Range:	HCU: -30°C to 60°C operating (10 minutes warm up at -30°C) SCU: 0°C to 50°C operating -30°C to 80°C storage
Relative Humidity:	< 95 % non condensing
User Interface:	SCU: LCD-Display 2 x 40 characters, 4 cursor keys, 4 function keys HCU: VFD-Display 2 x 40 characters, 4 cursor keys, 4 function keys
Power Supply:	85...264 V AC, 40...70 Hz
Power Consumption:	Max: 33 VA / 20 W Typ: 29 VA / 18 W (single converters)
Mains Fuse:	2 x 3.15 A time-lag fuse
Dimension and Weight:	483 x 44 x 500 mm ³ , 1 RU (19") appr. 8.4 kg

Specifications are subject to change

Order Information:

HCU-[RF Band(s)]-[IF Band in MHz]-[IF Imp in Ω]-[Options] Single or Dual converter
HCUx-[RF Band(s)]-[IF Band in MHz]-[IF Imp in Ω]-[Options] Multiband converter
SCU-[RF Band(s)]-[IF Band in MHz]-[IF Imp in Ω]-[Options] Single or Dual converter
SCUx-[RF Band(s)]-[IF Band in MHz]-[IF Imp in Ω]-[Options] Multiband converter
 x=2: Dualband converter, x=3: Triband converter

Possible Options are: **FAN** (internal Fan)
LPN (low phase noise)
IFT (additional IF test output)
VFD (VFD display, standard with HCU-type converters)

Examples:

HCU-C-70-50 (C-band upconverter)
SCU-Ku-140-75-FAN (Ku-band upconverter with internal Fan)
HCU-C-70/140-50 (C-Band upconverter dual IF 70 and 140 MHz)
HCU3-CXKu-70-50 (Triband upconverter)
SCU-CKu-70-75 (Dual channel upconverter C-band and Ku-band, identical IF and impedance)
SCU-C-70-75/Ku-140-50-FAN (Dual channel upconverter C-band and Ku-band with Fan, different IF and impedance)

Satellite Downconverter

Indoor Version

Single / Dual / Triple Band Downconverter or Dual Channel Downconverter S-Type (standard version), H-Type (MIL version, extended temperature range)

Downconverter Type:	HCD-S / SCD-S	HCD-C / SCD-C	HCD-C1 / SCD-C1	
RF-Input Frequency:	S-Band 2.025...2.290 GHz**	C-Band 3.4...4.2 GHz	X-Band 3.4...4.8 GHz	
Intermediate Frequency:	2450 MHz for 70 MHz IF Output 2440 MHz for 140 MHz IF Output	2150 MHz for 70 MHz IF Output 2140 MHz for 140 MHz IF Output	2150 MHz for 70 MHz IF Output 2140 MHz for 140 MHz IF Output	
Phase Noise:	10 Hz 100 Hz 1 kHz 10 kHz 100 kHz 1 MHz	- 60 - 80 - 90 - 96 - 103 ¹⁾ - 112 ¹⁾	- 56 - 71 ²⁾ - 76 - 81 ²⁾ - 86 - 91 ²⁾ - 96 - 101 ²⁾ - 101 ¹⁾ - 103 ²⁾¹⁾ - 111 ¹⁾ - 116 ²⁾¹⁾	- 53 - 68 ²⁾ - 73 - 78 ²⁾ - 83 - 88 ²⁾ - 93 - 98 ²⁾ - 98 ¹⁾ - 100 ²⁾¹⁾ - 108 ¹⁾ - 113 ²⁾¹⁾
	max. values in dBc/ Hz ¹⁾ 0°C to 50°C, outside this temperature range degraded by max 5 dB. ²⁾ with option: low phase noise			
Test Output (Fixed Oscillator):	2520 MHz (70 MHz IF) 2580 MHz (140 MHz IF) -6 ± 3 dBm, Connector SMA female	2220 MHz (70 MHz IF) 2280 MHz (140 MHz IF) -6 ± 3 dBm, Connector SMA female	2220 MHz (70 MHz IF) 2280 MHz (140 MHz IF) -6 ± 3 dBm, Connector SMA female	
Test Output (Microwave Oscillator):	4.475...4.74 GHz (70 MHz IF) 4.465...4.73 GHz (140 MHz IF) -7 ± 3 dBm SMA female	5.55...6.35 GHz (70 MHz IF) 5.54...6.34 GHz (140 MHz IF) -7 ± 3 dBm SMA female	5.55...6.95 GHz (70 MHz IF) 5.54...6.94 GHz (140 MHz IF) -7 ± 3 dBm SMA female	

Downconverter Type:	HCD-X	HCD-Ku / SCD-Ku	HCD-Ku4 / SCD-Ku4	
RF-Input Frequency:	X-Band 7.25...7.75 GHz	Ku-Band 10.70...12.75 GHz	Ku-Band 9.3...9.5 GHz	
Intermediate Frequency:	2150 MHz for 70 MHz IF Output 2140 MHz for 140 MHz IF Output	2150 MHz for 70 MHz IF Output 2140 MHz for 140 MHz IF Output	2150 MHz for 70 MHz IF Output 2140 MHz for 140 MHz IF Output	
Phase Noise:	10 Hz 100 Hz 1 kHz 10 kHz 100 kHz 1 MHz	- 53 - 68 ²⁾ - 73 - 78 ²⁾ - 83 - 88 ²⁾ - 93 - 98 ²⁾ - 98 ¹⁾ - 100 ²⁾¹⁾ - 108 ¹⁾ - 113 ²⁾¹⁾	- 50 - 65 ²⁾ - 70 - 73 ²⁾ - 80 - 85 ²⁾ - 90 - 95 ²⁾ - 95 ¹⁾ - 97 ²⁾¹⁾ - 105 ¹⁾ - 110 ²⁾¹⁾	- 50 - 65 ²⁾ - 70 - 73 ²⁾ - 80 - 85 ²⁾ - 90 - 95 ²⁾ - 95 ¹⁾ - 97 ²⁾¹⁾ - 105 ¹⁾ - 110 ²⁾¹⁾
	max. values in dBc/ Hz ¹⁾ 0°C to 50°C, outside this temperature range degraded by max 5 dB. ²⁾ with option: low phase noise			
Test Output (Fixed Oscillator):	2220 MHz (70 MHz IF) 2280 MHz (140 MHz IF) -6 ± 3 dBm, Connector SMA female	2220 MHz (70 MHz IF) 2280 MHz (140 MHz IF) -6 ± 3 dBm, Connector SMA female	2220 MHz (70 MHz IF) 2280 MHz (140 MHz IF) -6 ± 3 dBm, Connector SMA female	
Test Output (Microwave Oscillator):	9.40...9.90 GHz (70 MHz IF) 9.39...9.89 GHz (140 MHz IF) -7 ± 3 dBm SMA female	12.85...14.90 GHz (70 MHz IF) 12.84...14.89 GHz (140 MHz IF) -7 ± 3 dBm SMA female	11.45...11.65 GHz (70 MHz IF) 11.44...11.64 GHz (140 MHz IF) -7 ± 3 dBm SMA female	
Conversion Scheme:	Dual down-conversion, no frequency inversion			
Frequency Resolution:	10 Hz			
RF-Input Characteristics:	Impedance: Return Loss: Max. input level: LO Leakage: RF-Connector:	50 Ω >20 dB < approx. -25 dBm (operational) < approx. +10 dBm (damage level) -80 dBm max. SMA female		
IF-Output Characteristics:	Frequency: Impedance: Return Loss: 1 dB Compression Point: Output Muting: IF-Signal Monitor: IF-Connectors:	70 ± 20 MHz or 140 ± 40 MHz (optional: both → [IF-Band] = 70/140) 50 or 75 Ω 26 dB min >10 dBm, 13 dBm typical >60 dB (by command or sense input or by alarm condition) -20 dB of IF-output BNC female		
Transfer Characteristics:	Max. Conversion Gain: Attenuation Range: Gain Accuracy: Level Stability: Amplitude Response: Image Rejection: Noise Figure:	45 dB 0...30 dB, Step 0.1 dB (Conversion Gain 45...15 dB) ± 1 dB ± 0.25 dB/day (constant temperature) ± 0.25 dB / ±20 MHz, ±0.2 dB / ± 18 MHz >80 dB <12 dB, 10 dB typical		

Specifications continued next page

Satellite Downconverter

Indoor Version

Single / Dual / Triple Band Downconverter or Dual Channel Downconverter S-Type (standard version), H-Type (MIL version, extended temperature range)

Specifications continued:

Equalizer (Gain Slope):	max ± 2.5 dB / 40 MHz (IF 70 MHz), max ± 4 dB / 80 MHz (IF 140 MHz) (programmable)
Group Delay (± 18 MHz):	Linear: 0.03 ns / MHz max. Parabolic: 0.01 ns / MHz ² max. Ripple: 1 ns peak to peak max.
Group Delay (± 36 MHz):	Linear: 0.015 ns / MHz max. Parabolic: 0.005 ns / MHz ² max. Ripple: 2 ns peak to peak max.
Intermodulation (3rd Order):	-60 dBc max (Δf_{in} : 5 MHz, P_{in} : 2 x -40 dBm, P_{out} : 2 x -10 dBm)
AM / PM conversion:	0.1° / dB (P_{out} = 0 dBm)
Spurious Outputs:	Signal related: < -60 dBc (Δf < 1 MHz), < -70 dBc ($\Delta f \geq 1$ MHz) Signal independent: < -76 dBm (< -80 dBm typical)
Frequency Stability:	$\pm 1 \times 10^{-7}$, 0°C to 50°C $\pm 2 \times 10^{-8}$, 0°C to 50°C (after 30 min warm up) $\pm 5 \times 10^{-9}$ per day (fixed temperature after 24 h warm up)
Reference Input:	Frequency: 10 MHz or 5 MHz Level: -3...10 dBm Modes: internal, external, auto (senses reference input) Connector: BNC female
Reference Output	Frequency: 10 MHz Level: 0 \pm 3 dBm Connector: BNC female
Monitoring and Control Interface:	Protocol: SNMP Connection: UDP over Ethernet (10 or 100 Mbit/s, auto sensing), connector RJ-45 Protocol: HTTP (web browser interface) Connection: TCP/IP over Ethernet (10 or 100 Mbit/s, auto sensing), connector RJ-45 Protocol: Multipoint Connection: RS232 or RS422/RS485 (configurable), connector DSUB09 female or TCP/IP over Ethernet (10 or 100 Mbit/s, auto sensing), connector RJ-45
Alarm Interface: Mute Input:	Alarm: two potential free contacts (DPDT), Mute Input: TTL logic input with internal pull up Connector DSUB09 female
Temperature Range:	HCU : -30°C to 60°C operating (10 minutes warm up at -30°C) SCU : 0°C to 50°C operating -30°C to 80°C storage
Relative Humidity:	< 95 % non condensing
User Interface:	SCU: LCD-Display 2 x 40 characters, 4 cursor keys, 4 function keys HCU: VFD-Display 2 x 40 characters, 4 cursor keys, 4 function keys
Power Supply:	85...264 V AC, 40...70 Hz
Power Consumption:	Max: 33 VA / 20 W Typ: 29 VA / 18 W (single converters)
Mains Fuse:	2 x 3.15 A time-lag fuse
Dimension and Weight:	483 x 44 x 500 mm ³ , 1 RU (19") appr. 8.2 kg

Specifications are subject to change

Order Information:

HCD-[RF Band(s)]-[IF Band in MHz]-[IF Imp in Ω]-[Options] Single or Dual converter

HCDx-[RF Band(s)]-[IF Band in MHz]-[IF Imp in Ω]-[Options] Multiband converter

SCD-[RF Band(s)]-[IF Band in MHz]-[IF Imp in Ω]-[Options] Single or Dual converter

SCDx-[RF Band(s)]-[IF Band in MHz]-[IF Imp in Ω]-[Options] Multiband converter

x=2: Dualband converter, x=3: Triband converter

Possible Options are:

FAN (internal Fan)

LPN (low phase noise)

VFD (VFD display, standard with HCD-type converters)

ALC-BW (Automatic level control- Filter bandwidth, see product:
Automatic Level Control)

Examples:

HCD-C-70-50 (C-band downconverter)

SCD-Ku-140-75-FAN (Ku-band downconverter with internal Fan)

HCD-C-70/140-50 (C-Band downconverter dual IF 70 and 140 MHz)

HCD3-CXKu-70-50 (Triband downconverter)

SCD2-CKu-70-75 (Dualband downconverter)

SCD-CKu-70-75 (Dual channel downconverter C-band and Ku-band, identical IF and impedance)

SCD-C-70-75/Ku-70-50-FAN (Dual channel upconverter C-band and Ku-band with Fan,
different IF and impedance)

