

1250 Watt Ku-Band Rack Mount High Power Amplifier



FEATURES

- *Compact 6 RU package*
- *Digital display & control interface*
- *High efficiency*
- *Complete RS-232/ 422/485 interface*
- *Linearizer & harmonic/RX filters included*

The **XTRD-1250KL** is a highly efficient rack mountable traveling wave tube amplifier (TWTA) designed for uplink applications. The unit includes RF gain control, predistortion linearizer, a solid state pre-amplifier, cooling, and monitoring and control (M&C) system. Rack space is conserved because the amplifier occupies only 6 rack units (10.45 inches) of a standard 19 inch rack cabinet.

The unit features a menu driven front panel display and RS-232/422/485 serial port interfaces for complete computer control. Ethernet is also available as an option. RF, traveling wave tube, and default parameters are easily monitored on the 4-line front panel display. Gain control is provided via the front panel or through the serial interface.


The **XTRD-1250KL** incorporates high efficiency, multi-stage collector TWTs. Reliability is enhanced because both prime power consumption and internal operating temperatures are reduced for both the linear and saturated modes of operation. Power factor correction circuitry is also included which minimizes line current distortion and reduces the required Volt-Amps input. The automatic features of the high frequency resonant conversion power supply include quick recovery from prime power outages and multiple helix fault resets (three fault cycles). Depending upon user requirements, the amplifier can be configured for either single thread or redundant system operation.






PERFORMANCE SPECIFICATION

Parameters	XTRD-1250KL
FREQUENCY RANGE	13.75 to 14.5 GHz
OUTPUT POWER	
Traveling Wave Tube (typical)	61.0 dBm (1250 W)
HPA Flange Peak Power (typical)	60.5 dBm (1110 W)
Linear Rated Power, HPA Flange	56.5 dBm (450 W)
Single Carrier Power, HPA Flange (Typical)	57.0 dBm (500 W)
Rated Power @ Amplifier Flange (minimum)	
GAIN	
Large Signal (minimum)	70 dB
Small Signal (minimum)	70 dB
Attenuator Range (continuous)	25 dB
Maximum SSG Variation Over:	
Any Narrow Band	1.0 dB per 80 MHz
Full Band	2.5 dB per 500 MHz
Slope (maximum)	± 0.04 dB/MHz
Stability, 24 hr. (maximum)	± 0.25 dB
Stability, Temperature (maximum)	± 1.0 dB over temperature range at any frequency
INTERMODULATION (maximum) with two equal carriers	-27 dBc @ 450 W total power
HARMONIC OUTPUT (maximum)	-60 dBc
AM/PM CONVERSION (maximum)	2.0 deg/dB at ≤ 450 W
NOISE POWER (maximum)	
Transmit Band	-70 dBW/4 kHz
Receive Band	-150 dBW/4 kHz 3.7 to 4.2 GHz
GROUP DELAY (maximum)	
Bandwidth	Any 80 MHz
Linear	0.01 nS/MHz
Parabolic	0.005 nS/MHz ²
Ripple	0.5 nS/Pk-Pk
RESIDUAL AM NOISE (maximum)	-50 dBc to 10 kHz -20 (1.5 + logf) dBc 10 to 500 kHz -85 dBc above 500 kHz
PHASE NOISE (maximum)	12 dB below IESS phase noise profile AC fundamental -50 dBc Sum of all spurs -47 dBc
VSWR	
Input (maximum)	1.3:1
Output (maximum)	1.3:1

BLOCK DIAGRAM

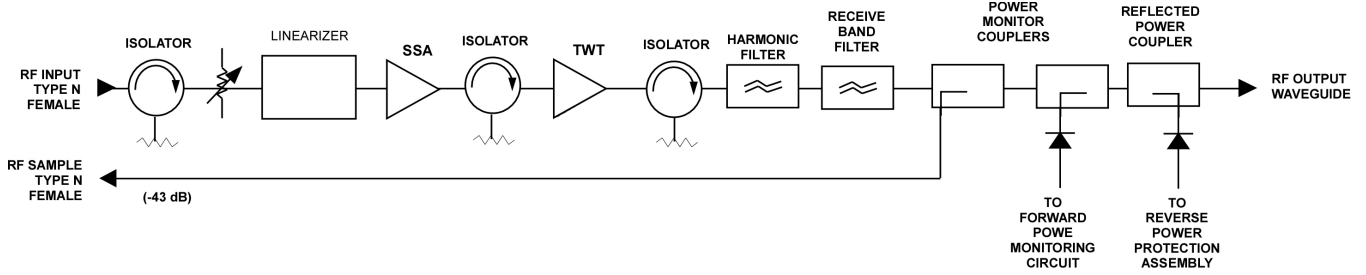

OUTLINE DRAWING

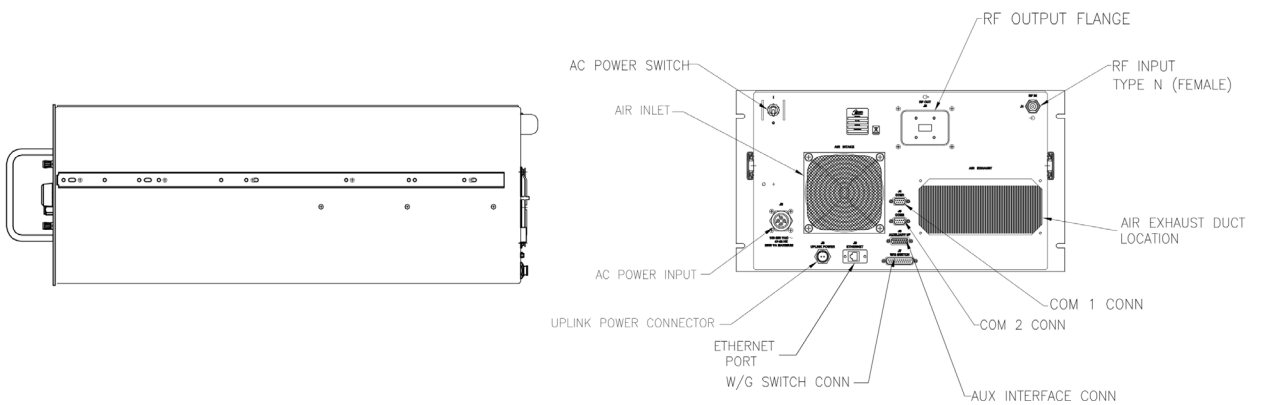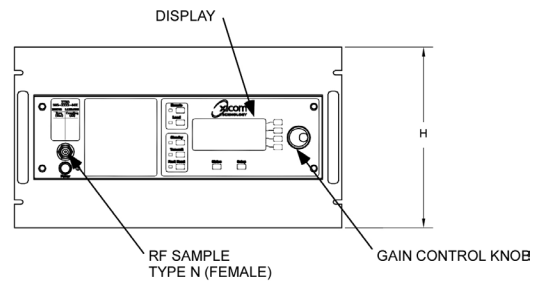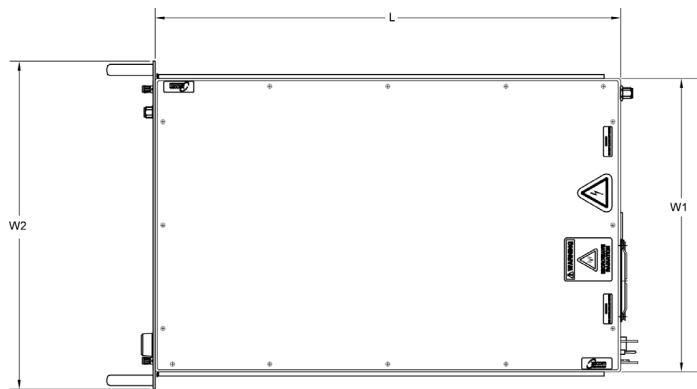

RF OUTPUT:	
C-Band	CPR-137G
Ku-Band	WR-75
Nominal Weight: 115 lbs (52.16 kg)	

	DIMENSIONS	
	INCHES	CENTIMETERS
W1	17.00	43.18
W2	19.00	48.26
L	27.00	68.58
H	10.47	26.59

PRIME POWER

180 to 260 VAC
 47 to 63 Hz, Single Phase
 2800 VA (maximum)
 0.95 Minimum Prime Power Factor



ENVIRONMENT

NONOPERATING TEMPERATURE RANGE	-50°C to +70°C
OPERATING TEMPERATURE RANGE	-10°C to +50°C (2°C/1000 Feet Derating)
HUMIDITY	Up to 95% Noncondensing
ALTITUDE	10,000 Feet MSL (maximum)
SHOCK AND VIBRATION	Normal Transportation
COOLING	Forced Air: 250 CFM (typical)

INTERFACE

	Type	Function		
CONTROLS	LOCAL	Local/Remote	AC Power On/OFF	
	LOCAL AND REMOTE	Gain	Transmit ON/OFF	
		Min/Max Power Alarm/Fault	Audio Alarm ON/OFF	
		Reflected Power Alarm/Fault	Units (Watts, dBm, dBW)	
		Fault Reset	Lamp Test	
		Heater Standby ON/OFF	Constant Power	
STATUS	FRONT PANEL LEDs	Standby	Power	
		Local	Remote	
		Summary Fault	High Voltage ON/OFF	
		Heater Time Out (FTD)	Heater Standby	
	FRONT PANEL DIGITAL DISPLAY	Power Out	Beam Hours	
		Reflected Power	Helix Current	
		TWT Temperature	Helix Voltage	
		Heater Hours	Faults: High VSWR High Voltage Helix Current TWT Temperature	
	DRY FORM-C RELAY CONTACTS (2)	Summary Fault		
	COMPUTER SERIAL PORT	HARDWARE INTERFACE	Two Ports: RS-232 & RS-422/RS-485	
XICOM COMMAND SET		ASCII Commands		
	RF SAMPLE PORT COUPLING	-43 dB Nominal		

OPTIONS

- Extended Frequency Coverage
- 1:1, 1:2, 1:N Redundancy
- Variable Phase Combined
- Built-in Redundancy Controller
- Ethernet
- Integral L-Band Block Upconverter (BUC)

AUTHORIZED REPRESENTATIVE

SERVSAT COMMUNICATIONS

www.servsat.com

sales@servsat.com

770-754-4547



Document XTRD-1250KL Rev 8, 07/25/2011

© 2011

Note: Technical specifications are subject to change without notice. Please contact Xicom Technology before using this information for system design.