



- 1/2 Cabinet Height of Compatible KPAs
- Complete Digital M&C Interface
- Harmonic & Receive Band Filtering
- Power Save Mode
- Power Supply Redundancy
- RS-232/485 Serial Interfaces

The XTK-3000C and XTK-3000C2 are compact Klystron Power Amplifiers (KPAs) designed for fixed and mobile uplink applications.

Reduced Size and Weight:

Xicom's KPAs are 1/2 the height of conventional KPAs. Reduced height is complimented by reduced weight. Shipping is greatly simplified as the RF Deck, Klystron Tube, and Power Supply are shipped individually and weigh 100 pounds each.

Microprocessor & Analog Control:

The units can be fully operated locally via the front panel or remotely via a RS-232 or RS-422/485 serial interface connection.

Additionally, users can bypass microprocessor control and operate the unit via the analog controls incorporated into the unit. This design

feature allows users complete flexibility in controlling the amplifier.

Additional Features:

1. Power supply redundancy: within each KPA are three redundant 5KW power supplies. Any two of these power supplies can fully operate the KPA, thereby enhancing operational reliability.
2. Active airflow: automatic sensing and control of blower speed which is independent of line voltage and frequency.
3. Fully power factor corrected for CE compliance.
4. Klystron tube removable through the front panel.
5. Fast-Tune option available.
6. Power Save Mode for Reduced Prime Power.

PERFORMANCE SPECIFICATIONS

Parameter	XTK-3000C	XTK-3000C2	XTK-3000C3
FREQUENCY RANGE	5.85 - 6.425 GHz	6.70 - 7.05 GHz	7.025 - 7.075 GHz
OUTPUT POWER			
Klystron	3350 W	3000W	3000W
Rated Power @ Amplifier Flange	3000 W	2600W	2600W
PRESET CHANNELS	12, 24	12	N/A
BANDWIDTH	45 MHz	40 MHz	50 MHz
GAIN		80 dB	
at rated power		0.40 dB Pk-Pk over $F_o \pm 13$ MHz	
variation, max (at rated power)		0.04/dB MHz over $F_o \pm 13$ MHz	
slope, maximum (at rated power)		$\pm .25$ dB/24 hrs at constant drive/temperature	
Stability, 24 Hr maximum		± 2.5 dB at constant drive	
Stability, Temperature			
GAIN ADJUSTMENT		0 - 30 dB, 0.1 dB Steps	
INTERMODULATION w/2 = signals		-29 dBc max at 7 db total output backoff	
HARMONIC OUTPUT, maximum		-80 dBc	
AM TO PM CONVERSION			
maximum		4.0°/dB at rated power	
NOISE POWER, maximum			
Transmit Band		-70 dBw/4 KHz	
Receive Band		-150 dBw/4 KHz (3.7 - 4.2 GHz)	
		-110 dBw/4 KHz (4.2 - 40.0 GHz) excludes passband	
GROUP DELAY, maximum			
Bandwidth		Any 36 MHz	
Linear		0.25 nS/MHz	
Parabolic		0.05 nS/MHz squared	
Ripple		2.0 nS/PK-PK	
RESIDUAL AM NOISE, maximum			
		-50 dBc up to 10 KHz	
		-20 (1.5 + Log f) dBc 10 to 500 KHz	
		-85 dBc above 500 KHz	
PHASE NOISE, maximum		10 dB below IESS-308 phase noise profile	
VSWR			
Input, maximum		1.2:1	
Output, maximum		1.25:1	
Load w/o damage		2.0:1	
Load, Shutdown		>2.0:1	

PRIME POWER

190-260 VAC, L-L, Delta
 50-60 Hz, Three Phase, Three Wire, Plus Ground
 11500 VA max
 .95 minimum power factor
 180% max in rush current



OPTIONS

330-450 VAC, L-L, Wye
 50-60 Hz, Three Phase, Four Wire + Ground
 Redundant 1:1 Configuration in One Cabinet
 Phase Combined & 1:N Configurations
 Extended Frequency 5.85 to 6.65 GHz
 80 MHz Bandwidth
 Fast Tuner (< 1 second)

ENVIRONMENT


NON-OPERATING TEMPERATURE RANGE
 OPERATING TEMPERATURE RANGE
 ALTITUDE
 SHOCK AND VIBRATION
 RELATIVE HUMIDITY

-50 C to +70 C
 -10 C to +50 C
 10,000 feet MSL maximum
 Normal Transportation
 95% Non-Condensing



INTERFACE

TYPE AND MODE		FUNCTION
CONTROLS AC Power ON	Local	Local/Remote
		Lamp Test Channel Selector
	Local and Remote	Emergency Stop
		Heater Standby ON/OFF Lamp Test Fault Simulation Test Audio Alarm ON/OFF Fault Reset Attenuator Setting
		Channel Selection (Optional) Beam Voltage Adjust HV ON/OFF Units (Watts, dBm, dBw) RF Inhibit Auto Power Save
STATUS	Front Panel LEDs	HV ON Standby Heater Standby Remote Mode Summary Fault
	Front Panel Digital Display	Heater Time Out (FTD) High Voltage Fault Local Mode Body Current Fault
		Power Out Attenuator Setting Body Current Beam Current Heater Voltage Heater Hours Beam Hours Waveguide Arc Blower Pressure Fan Speed
	Dry Form-C Relay Contacts (Two)	Reflected Power Klystron Temperature Beam Voltage Channel Selected Faults: High VSWR Body Current High Voltage Klystron Temperature P.S. Temperature Blower
COMPUTER SERIAL PORT RF SAMPLE PORT COUPLING	Hardware Interface Xicom Command Set	Summary Fault
		RS-232 ASCII Commands -50 dB Nominal
		RS-232/RS-422/RS-485

BLOCK DIAGRAM

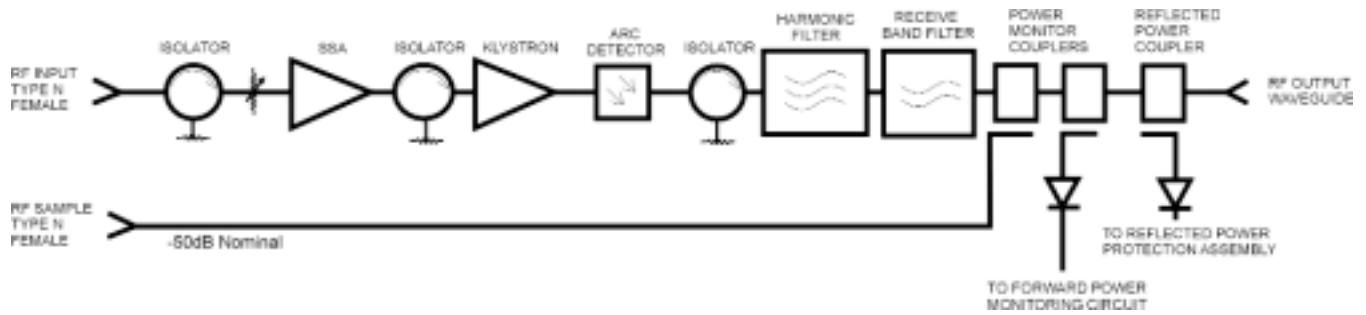

OUTLINE DRAWING

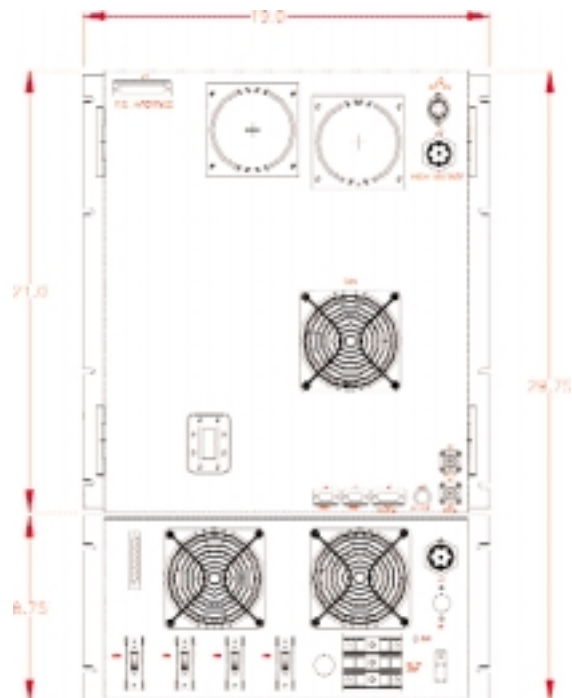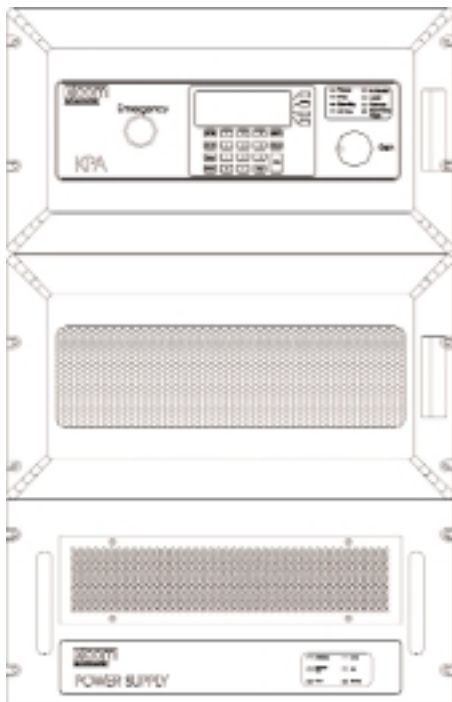

Weight: 300 lbs
 RF Output: CPR-137G
 H: 29.75 inches
 W: 19.00 inches